



## STANDARD FEATURES:

- Eco-friendly R-454B refrigerant with low GWP
- Energy-efficient compressor
- Equipped with thermal overload protection
- High quality copper tube and aluminum fin condenser
- Service valves with sweat connections and easy-access gauge ports
- Factory-installed high pressure switch and low pressure switch
- AHRI certified and ETL listed
- Filter drier included

## CABINET FEATURES:

- Compact design allows for ease of installation, clearance, durability, and maneuverability
- Powder-coated galvanized steel cabinet
- Protective steel louvered coil guard
- Steel wire axial fan guard
- ECM fan motor and unique blade style allowing for smooth discharge air and quieter operation

## SPLIT SYSTEM HEAT PUMP

*Up to 15.2 SEER2*

*Cooling capacity: 18 - 60 kBtu/h*



For the latest AHRI system matches,  
please visit [www.marsdeliversratings.com](http://www.marsdeliversratings.com)  
or [AHRIdirectory.org](http://AHRIdirectory.org)



### Limited Warranty

5 years on parts and 10 years on compressor and heat exchanger. Unit cost replacement if heat exchanger, condenser coil, evaporator coil (excludes cased coils), or compressor fails in the first year.  
With registration, 10 years on all parts and 20 years on heat exchanger.

(Limitations apply, see actual warranty for complete details.)

[www.century-hvac.com](http://www.century-hvac.com)

## MODEL NUMBER GUIDE

| S         | HP        | 14        | 18                      | S                      | 1                         | A              |
|-----------|-----------|-----------|-------------------------|------------------------|---------------------------|----------------|
| SE Series | Heat Pump | SEER<br>2 | Capacity<br>BTUH x 1000 | Standard<br>efficiency | Power<br>1 = 208/230-1-60 | Revision Level |

## SPECIFICATIONS

|                                 | SHP1418S1A   | SHP1424S1A   | SHP1430S1A   | SHP1436S1A  |
|---------------------------------|--------------|--------------|--------------|-------------|
| <b>NOMINAL CAPACITY</b>         |              |              |              |             |
| Cooling (BTU/h)                 | 18,000       | 23,000       | 28,000       | 34,200      |
| Heating (BTU/h)                 | 18,000       | 22,800       | 27,000       | 34,200      |
| <b>ELECTRICAL DATA</b>          |              |              |              |             |
| Voltage / Phase (60 Hz)         | 208/230 / 1  | 208/230 / 1  | 208/230 / 1  | 208/230 / 1 |
| Min. / Max. Voltage             | 187/253      | 187/253      | 187/253      | 187/253     |
| MCA                             | 11.5         | 14.7         | 17.2         | 21.5        |
| MOP                             | 19.9         | 25.4         | 29.8         | 37.5        |
| <b>COMPRESSOR</b>               |              |              |              |             |
| Type                            | Scroll       | Scroll       | Scroll       | Scroll      |
| Stage                           | Single       | Single       | Single       | Single      |
| RLA                             | 8.4          | 10.7         | 12.7         | 16          |
| LRA                             | 47           | 59           | 71           | 86          |
| Crankcase Heater                | Yes          | Yes          | Yes          | Yes         |
| <b>CONDENSER COIL</b>           |              |              |              |             |
| Type                            | Tube & Fin   | Tube & Fin   | Tube & Fin   | Tube & Fin  |
| Tube Size (O.D.)                | 3/16         | 9/32         | 9/32         | 9/32        |
| <b>FAN MOTOR</b>                |              |              |              |             |
| Motor Type                      | ECM          | ECM          | ECM          | ECM         |
| Capacitor (uF)                  | /            | /            | /            | /           |
| Horsepower (HP)                 | 1/6          | 1/6          | 1/6          | 1/3         |
| Full Load Amps (FLA)            | 1            | 1.3          | 1.3          | 1.5         |
| <b>REFRIGERATION SYSTEM</b>     |              |              |              |             |
| Liquid Valve Size (O.D.)        | 3/8          | 3/8          | 3/8          | 3/8         |
| Valve Size (O.D.)               | 3/4          | 3/4          | 3/4          | 3/          |
| Liquid Line Size (O.D.)         | 3/8          | 3/8          | 3/8          | 3/8         |
| Suction Line Size (O.D.)        | 3/4          | 3/4          | 3/4          | 3/4         |
| Refrigerant Charge (lbs. - oz.) | 4 LBS.-11 OZ | 5 LBS.-13 OZ | 5 LBS.-13 OZ | 5 LBS.-9 OZ |
| <b>OPERATION RANGE</b>          |              |              |              |             |
| Cooling (°F)                    | 55-120       | 55-120       | 55-120       | 55-120      |
| Cooling (°C)                    | 12.7-48.9    | 12.7-48.9    | 12.7-48.9    | 12.7-48.9   |
| Heating (°F)                    | 5-86         | 5-86         | 5-86         | 5-86        |
| Heating (°C)                    | -15-30       | -15-30       | -15-30       | -15-30      |
| Sound Power (dB)                | 73           | 75           | 75           | 77          |


### NOTE:

For the latest AHRI system matches, please visit  
[www.marsdeliversratings.com](http://www.marsdeliversratings.com) or [www.AHRIdirectory.org](http://www.AHRIdirectory.org)



## SPECIFICATIONS

|                                 | SHP1442S1A   | SHP1448S1A   | SHP1460S1A   |
|---------------------------------|--------------|--------------|--------------|
| <b>NOMINAL CAPACITY</b>         |              |              |              |
| Cooling (BTU/h)                 | 41,000       | 45,000       | 54,000       |
| Heating (BTU/h)                 | 41,000       | 44,500       | 54,000       |
| <b>ELECTRICAL DATA</b>          |              |              |              |
| Voltage / Phase (60 Hz)         | 208/230 / 1  | 208/230 / 1  | 208/230 / 1  |
| Min. / Max. Voltage             | 187/253      | 187/253      | 187/253      |
| MCA                             | 26.2         | 28           | 36.9         |
| MOP                             | 45.7         | 48.7         | 64.6         |
| <b>COMPRESSOR</b>               |              |              |              |
| Type                            | Scroll       | Scroll       | Scroll       |
| Stage                           | Single       | Single       | Single       |
| RLA                             | 19.6         | 20.8         | 27.8         |
| LRA                             | 96           | 95           | 125          |
| Crankcase Heater                | Yes          | Yes          | Yes          |
| <b>CONDENSER COIL</b>           |              |              |              |
| Type                            | Tube & Fin   | Tube & Fin   | Tube & Fin   |
| Tube Size (O.D)                 | 3/16         | 3/16         | 3/16         |
| <b>FAN MOTOR</b>                |              |              |              |
| Motor Type                      | ECM          | ECM          | ECM          |
| Capacitor (uF)                  | /            | /            | /            |
| Horsepower (HP)                 | 1/3          | 1/3          | 1/3          |
| Full Load Amps (FLA)            | 1.7          | 2.0          | 2.0          |
| <b>REFRIGERATION SYSTEM</b>     |              |              |              |
| Liquid Valve Size (O.D.)        | 3/8          | 3/8          | 3/8          |
| Valve Size (O.D.)               | 3/4          | 7/8          | 7/8          |
| Liquid Line Size (O.D.)         | 3/8          | 3/8          | 3/8          |
| Suction Line Size (O.D.)        | 3/4          | 7/8          | 1-1/8        |
| Refrigerant Charge (lbs. - oz.) | 6 LBS.-11 OZ | 6 LBS.-11 OZ | 6 LBS.-15 OZ |
| <b>OPERATION RANGE</b>          |              |              |              |
| Cooling (°F)                    | 55-120       | 55-120       | 55-120       |
| Cooling (°C)                    | 12.7-48.9    | 12.7-48.9    | 12.7-48.9    |
| Heating (°F)                    | 5-86         | 5-86         | 5-86         |
| Heating (°C)                    | -15-30       | -15-30       | -15-30       |
| Sound Power (dB)                | 78           | 78           | 80           |

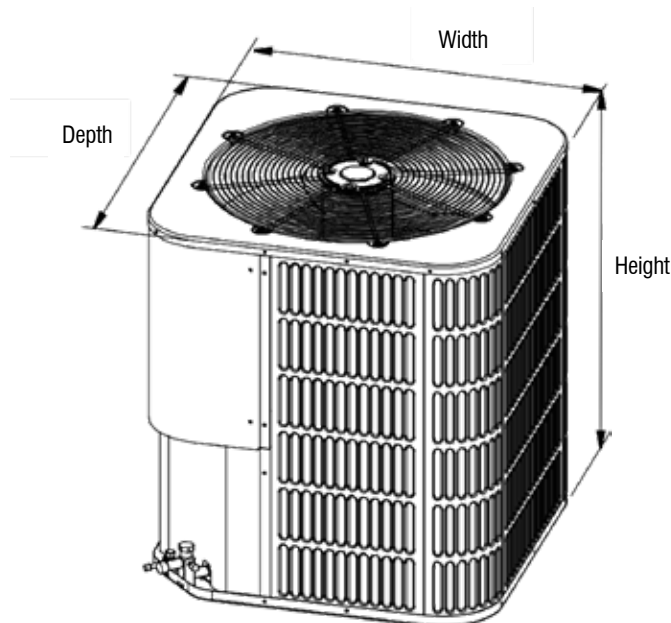

|                        | SHP1418S1A | SHP1424S1A | SHP1430S1A | SHP1436S1A | SHP1442S1A | SHP1448S1A | SHP1460S1A |
|------------------------|------------|------------|------------|------------|------------|------------|------------|
| DIMENSIONS AND WEIGHTS |            |            |            |            |            |            |            |
| Height (in.)           | 24-15/16   | 24-15/16   | 24-15/16   | 24-15/16   | 33-3/16    | 33-3/16    | 33-3/16    |
| Width (in.)            | 23-5/8     | 28         | 28         | 29-1/8     | 28         | 28         | 29-1/8     |
| Depth (in.)            | 23-5/8     | 28         | 28         | 29-1/8     | 28         | 28         | 29-1/8     |
| Weight (lbs.)          | 137        | 154        | 157        | 179        | 198        | 201        | 218        |

"This product complies with all California product labeling laws including, but not limited to, the Safe Drinking Water and Toxic Enforcement Act of 1986, more commonly known as Proposition 65."

*Due to ongoing product improvements, specifications and dimensions are subject to change and correction without notice or incurring obligations. Determining the application and suitability for use of any product is the responsibility of the installer. Additionally, the installer is responsible for verifying dimensional data on the actual product prior to beginning any installation preparations.*

*Third party incentive and rebate programs have precise requirements as to product performance and certification. All products meet applicable regulations in effect on date of manufacture; however, certifications are not necessarily granted for the life of a product. Therefore, it is the responsibility of the applicant to determine whether a specific model qualifies for these incentive/rebate programs.*