



# Submittal Data

MODEL  
**RADS-61Q**

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Reference:

### PERFORMANCE DATA

Power supply 115V, 1Ph, 60Hz

#### Cooling

Capacity	Btu/h	6000
Input	W	535
Rated current	A	4.66
Max. Current	A	6.5
CEER	Btu/w	12.1
EER		12.2

#### Heating

Capacity	Btu/h	NA
RATED Input(Heater)	W	NA
Rated current	A	NA

### Compressor Electrical


Model	KSN50E12VAZB3	
Type	ROTARY	
Brand	GMCC	
Capacity	Btu/h	6176
Input	W	431
Rated current(RLA)	A	3.70
Refrigerant type	oz	R32/7.76

### Air flow & Noise level

Indoor air flow	CFM	169/145/132
Indoor noise level	dB(A)	56/53/52
Outdoor air flow	CFM	415/359/308
Outdoor noise level	dB(A)	63/60/58
Window Opening	Min/Max	23/36
	Width	
	Min Height	14

### Accessories

AS080	Window AC Support Bracket
NTN-2	Window AC Support Bracket

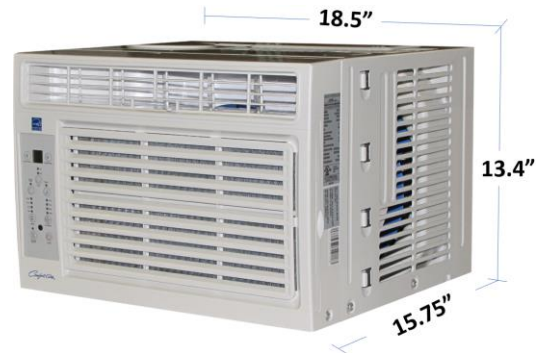

### Fan Motor

Model	YKTS-50-4-53L-1	
Input	W	80.0
Speed	RPM	1490/1320/1220

### Dimensional Data

Dimension(W*D*H)	inch	18.5/15.75/13.4
Packing (W*D*H)	inch	22.1/17.7/15
Net/Gross weight	lbs.	41.89/48.50

### SYSTEM DATA

Design pressure	PSIG	300/520
Thermostat type	Touchpad/Remote	
Application area (Cooling EPA)	150-250	

### Cord and Plug

Cord Length	ft.	6.5
Plug Face	Nema	LCDI(5-15P)

